NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS
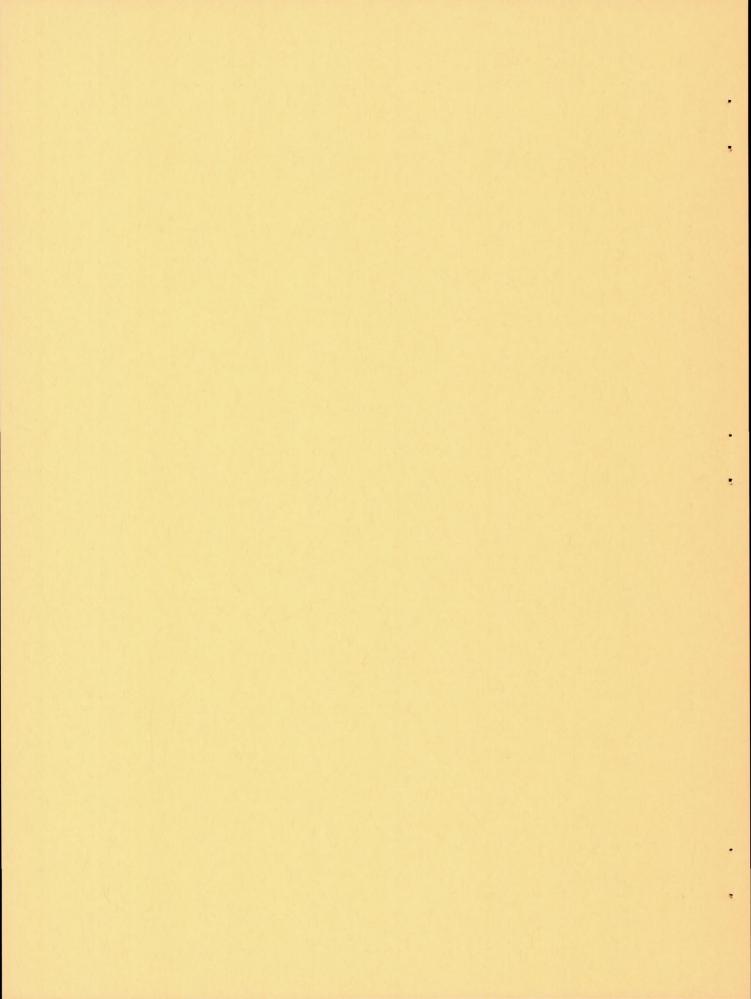
TECHNICAL NOTE 3312

INITIAL EXPERIMENTS ON FLUTTER OF UNSWEPT

CANTILEVER WINGS AT MACH NUMBER 1.3

By W. J. Tuovila, John E. Baker, and Arthur A. Regier

Langley Aeronautical Laboratory
Langley Field, Va.

NACA

Washington

November 1954

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE 3312

INITIAL EXPERIMENTS ON FLUTTER OF UNSWEPT

CANTILEVER WINGS AT MACH NUMBER 1.3*

By W. J. Tuovila, John E. Baker, and Arthur A. Regier

SUMMARY

A supersonic tunnel designed to operate at Mach number 1.3 was used
for a preliminary experimental flutter investigation of widely different
unswept cantilever wings. Data for 12 wings with mass-density parameters
$1/\kappa$ ranging from 52 to 268, center-of-gravity positions ranging from 46
to 63 percent chord from the leading edge, and elastic-axis positions
ranging from 34 to 52 percent chord from the leading edge are considered.

A comparison is made of the test results with calculations of
bending-torsion flutter obtained by the theory of flutter in supersonic
two-dimensional flow and it is concluded that the test data are in reason-
able agreement with the calculated results. In general, the theoretical
values are conservative. As shown by the theory, the flutter results are
quite sensitive to the location of the center of gravity. Thick and thin,
blunt and sharp airfoil-section shapes were used, but no very pronounced
effect of the section shape on flutter characteristics was found. The
experiments include a study of the effect of the addition of tip moments
of inertia. With the center of gravity of the tip weights coincident
with the center of gravity of the wing section, no detrimental effect on
the flutter speed was found.

INTRODUCTION

The background and theory for the flutter of an airfoil in a two-
dimensional flow at supersonic speeds is given in reference 1. The pres-
ent investigation is a preliminary survey to determine the possibility
of using the theory of reference 1 for flutter at supersonic speeds to
predict the coupled bending-torsion flutter of widely different unswept

---

*Supersedes the recently declassified NACA RM L8J11, "Initial
Experiments on Flutter of Unswept Cantilever Wings at Mach Number 1.3" by
W. J. Tuovila, John E. Baker, and Arthur A. Regier, 1949.

cantilever wings at a low supersonic Mach number. This preliminary investigation is not intended as a critical test of the theory since the analysis does not consider the effect of mode shape, aspect ratio, section shape, tip Mach cone, or viscous effects.

A single-degree-of-freedom torsional instability which may occur in the Mach number range 1.0 to 1.58 is discussed in reference 1. In order also to investigate the possible occurrence of such single-degree flutter on cantilever wings, the test apparatus was designed to operate at a Mach number of 1.3.

A brief discussion is given of the effects of concentrated masses placed at the wing tip, the center of gravity of the masses coinciding with the center of gravity of the wing, and the effects of sharp and blunt leading edges on the wings.

SYMBOLS

b semichord, ft

c_w chord, ft

GJ torsional stiffness, in^2-lb

ρ mass density of air in test section, slugs/cu ft

m mass of wing per unit span, slugs/ft

M Mach number

$1/\kappa$ mass-density parameter, $m/\pi\rho b^2$

I_α mass moment of inertia of wing about elastic axis per unit span

r_α^2 radius-of-gyration parameter, I_α/mb^2

V flutter velocity, ft/sec

f_f flutter frequency, cps

f_h first-bending frequency, cps

f_α first-torsion frequency, cps

$\omega_f = 2\pi f_f$

$\omega_h = 2\pi f_h$

$\omega_\alpha = 2\pi f_\alpha$

g_h first-bending damping coefficient

g_α first-torsion damping coefficient

APPARATUS AND TEST METHODS

The tests were made at a Mach number of 1.3 in an "intermittent" two-dimensional supersonic tunnel having a 9.24-inch by 18.23-inch test section (figs. 1 and 2). The apparatus operates from atmospheric pressure to a vacuum. A quick-operating valve allows a steady-flow condition to be reached in approximately 0.15 second and this condition of steady flow can be maintained for 5 to 7 seconds. To prevent condensation in the test section, a room was constructed at the tunnel entrance in which the air could be heated. Variation of the air temperature from 170° F to 200° F results in a velocity range at the test section from 950 miles per hour to 990 miles per hour at a Mach number of 1.3. The test-section Mach number determined by optical means varied from 1.29 to 1.31. The test-section Mach number determined by a pressure survey showed a variation from 1.31 to 1.33 (fig. 3).

The models were mounted cantilever fashion from the side of the tunnel (fig. 4). In order to avoid possible model failure during the tunnel transient conditions, and since supersonic flutter characteristics were being determined, it was desirable to withhold the model from the flow during the periods of acceleration and deceleration. A pneumatic-cylinder arrangement was installed for this purpose (fig. 2). With this device, the model could be held outside the tunnel wall until stable flow conditions were reached; then, by means of electrically operated valves controlled by an observer, the model could be projected into the tunnel slowly and withdrawn quickly if necessary.

The flutter models were of rectangular plan form and were constructed of laminated Sitka spruce or aluminum alloy. The wing dimensions and parameters are given in table I. The wing chords ranged from 3.03 to 4.22 inches and the lengths (semispan) from 6 to 9.12 inches. Both thick and thin sections with blunt and sharp leading edges were used. The airfoil sections used were 3-, 5-, and 8-percent-thick circular arcs, 3-percent-thick double wedge, NACA 16-010, and NACA 65-007. The mass-density parameter $1/\kappa$ ranged from 52 to 268, the chordwise positions of the center of gravity ranged from 46 to 63 percent chord, and the positions of the elastic axis ranged from 34 to 52 percent chord.

Before each model was installed in the tunnel, its weight, moment of inertia, and section center-of-gravity position were determined. After installation in the tunnel, the elastic axis was located by observing the axis of zero twist optically. The first-bending frequency and the damping were obtained from a free-vibration record of the model. Since the wings were structurally uniform, the stiffness parameter GJ could be computed from a torsional-vibration record obtained with a mass of large known moment of inertia attached to the wing tip. The uncoupled first-torsion frequency could then be calculated. The torsional damping was determined from the torsional-vibration-decay curve.

The models were designed not to flutter on the first run. The models were progressively modified by adding lead to shift their centers of gravity and by slotting to shift their elastic axes and change their bending and torsion frequencies, until flutter occurred. If a model was saved, its parameters were changed to yield another flutter point. The values of the radius-of-gyration parameter r_α^2 and chordwise center of gravity were determined from the unmodified wing and the added masses.

During each test run, the following data were recorded simultaneously by means of a recording oscillograph: flutter frequency, position of the model in the tunnel, and static pressure.

A sample record of the flutter of model B-5 is given in figure 5.

METHOD OF ANALYSIS

The flutter data for the particular wings tested are put in coefficient form and compared with the analytic solution of the supersonic bending-torsion flutter problem in a two-dimensional flow given in reference 1. The data of this paper were obtained at a Mach number of 1.3 and, since aerodynamic coefficients at this Mach number are not included in reference 1, a linear interpolation was made between the computed values of the flutter-speed coefficient at Mach numbers of 1.25 and 1.43, for which the aerodynamic coefficients are available. First-bending and uncoupled first-torsion frequencies and damping coefficients g_h and g_α were used in the theoretical analyses.

An examination of the possible errors introduced into the results by the method of interpolation is desirable. It is known that the error may be very large; for example, in the case of torsional instability in one degree of freedom for the elastic-axis position at 50 percent chord, the interpolation was made directly between the aerodynamic coefficients at Mach numbers 1.25 and 1.43. This interpolation was necessary since the wing was stable at a Mach number of 1.43 and the theory yields no solution for the flutter-speed coefficient under these conditions.

RESULTS AND DISCUSSION

The significant flutter parameters and the results of the calcula-
tions are given in table I. A large number of tests were made on wings
which did not flutter, but table I gives only the results for the wings
for which flutter was observed. Altering a model to obtain flutter con-
sisted in moving the center of gravity back in increments of about 2 per-
cent of the chord. Consequently, the chordwise position of the center
of gravity that would produce flutter is known to within about 2 percent
chord. The results are sensitive to center-of-gravity position and this
sensitivity may account for some of the scatter of the data. Contributing
also to the scatter of the data are the inaccuracies in obtaining the wing
parameters, the effect of the degree of penetration of the model into the
tunnel, and errors in the determination of the flutter-speed coefficients
arising from the method of interpolation.

Some of the results listed in table I are presented in figures 6
and 7. In figure 6 the theoretical and experimental flutter-speed coef-
ficients are compared. The fact that the experimental data fall above
the 45° line, for the most part, indicates that the theory of reference 1
is generally conservative as far as application to cantilever wings is
concerned. From consideration of the fact that a slight inaccuracy in
the location of the center of gravity has a large effect and also that
effects of section shape, aspect ratio, and Mach cone are not accounted
for, the agreement is not unsatisfactory. The theoretical and experi-
mental flutter frequencies are compared in figure 7; the experimental
frequencies ranged from about 0.61 to 1.09 times the theoretical values.
In all cases the mode at flutter appeared to consist mainly of a coupling
of first-bending and first-torsion modes.

Since the present investigation is of a preliminary nature and covers
a wide range of parameters, no attempt was made to isolate the effects of
separate parameters such as the mass-density parameter, frequency ratio,
elastic axis, and center of gravity, which are treated by the two-
dimensional theory, or parameters such as aspect ratio not treated by
the theory.

An attempt was made to investigate some of the possible effects of
airfoil-section shape on flutter. The intermingling of the data for the
various models (figs. 6 and 7) suggests that the section shape has no
very pronounced effect on flutter at a Mach number of 1.3. However, more
difficulty due to divergence was experienced with thick models having
blunt leading edges. This result is in accord with the higher-order
method of calculation (order higher than in the linear method) for pres-
sure distribution at supersonic speeds in steady flow, which shows that
the center of pressure may move ahead of the 50-percent-chord position
for thick blunt-nosed airfoils, particularly at Mach numbers near unity.

It was observed in the tests that the thick airfoils tended to diverge even though the elastic axis was ahead of the 50-percent-chord position.

Since practical winged vehicles pass through the subsonic speed range in order to reach supersonic speeds, some discussion of and comparison with subsonic criteria are desirable. For this purpose, incompressible flutter-speed coefficients were computed by the method of reference 2 for which first bending and uncoupled first torsion frequencies and damping coefficients g_h and g_α were utilized. That flutter-speed coefficients based on subsonic theory are conservative with respect to supersonic speeds has been suggested in reference 3 and, in fact, is indicated by some of the calculations in reference 1. This conclusion is also indicated by the present tests, as illustrated in figure 8, in which the experimental flutter-speed coefficients are plotted against the incompressible theoretical flutter-speed coefficients. The statement may not be true in general; for example, the condition when the frequency ratio $\frac{\omega_h}{\omega_\alpha} = 1$ may need further investigation and, in any case, the margin of safety is not established. Some of the models were permitted to encounter the tunnel transient speeds and, for example, model F-1, which had fluttered at Mach number 1.3, was held in the tunnel while the tunnel was brought up to speed. The wing fluttered and broke at a Mach number of about 0.7, a result which is in general agreement with the subsonic calculation. Flutter data obtained with bombs and rocket missiles (references 4 to 6) and other experience indicate that if flutter failures occur, they occur, in general, at speeds near sonic. For the practical purpose of making preliminary estimates of a wing flutter speed, such formulas as, for example, the approximate flutter formula in reference 2 or similar criteria thus appear useful over a wide range of speeds.

In reference 3, Smilg suggests a torsional frequency criterion $\omega_\alpha c_w > 1,000$ feet per second as sufficient to prevent one degree of torsional flutter at supersonic speeds. The criterion is based on the assumption that the first-bending frequency is very high with respect to the first-torsion frequency. In order to explore this criterion, a cantilever model was equipped with tip weights at both the leading and trailing edges so that the torsional frequency was reduced. The results of the tests are shown in table II. In all cases a slight shift of the center of gravity ahead of the location at flutter stopped the flutter. The fact that flutter is extremely sensitive to the center-of-gravity position and that the values of the product $\omega_\alpha c_w$ are far below 1,000 indicates that the criterion is overly conservative when applied to cantilever wings with normal bending-torsion frequency ratios. The data further suggest that for cantilever wings the bending degree of freedom may suppress the one-degree-of-freedom torsional flutter and that bending-torsion effects occur.

The data further indicate that no harmful effect on the flutter speed ensues when the center of gravity of the tip weights and the wing coincide. It is observed that the frequency ratio varies from 0.55 to 0.85 and that the torsional frequency has been reduced to as low as one-third of the value for the wing without tip weights. For the largest mass moment of inertia on the wing tip (last case in table II), it was necessary to move the center of gravity farther toward the trailing edge to produce flutter.

In figure 9, the theoretical curves represent flutter-speed coefficients for one-degree-of-freedom flutter calculated according to reference 1. The experimental flutter-speed coefficients shown in this figure, however, correspond to the coupled bending-torsion values.

An effort was made to obtain some systematic aspect-ratio effects from the present tests, but the results were rather contradictory. Some models which spanned the tunnel (except for $\frac{1}{16}$-inch tip clearance) were used so that, presumably, two-dimensional flow over the wing could be expected. Flutter of full-span models of NACA 16-010 section could be stopped by retracting the tip from the boundary layer; however, when the tip was retracted from the boundary layer for the 3-percent-thick double-wedge models, the flutter amplitude increased. The effect of the subsonic boundary layer at the tip of the models is not known. In one particular case the model fluttered at 99 percent of the theoretical frequency on entering the tunnel and the frequency changed to 128 percent at a smaller amplitude when the model spanned the tunnel. As the model was retracted, the flutter frequency dropped to 99 percent of the theoretical value and fluttered to destruction. A more systematic investigation of the aspect ratio and tip and shape effects is desirable to clarify various aspects of the problem.

CONCLUSIONS

The results of a preliminary flutter investigation of widely different unswept cantilever wing models at a Mach number of 1.3 indicated the following conclusions:

1. Agreement between experimental and calculated flutter-speed coefficients is fairly satisfactory. In general, the theoretical values are conservative.

2. No very pronounced effect of airfoil-section shape on the flutter characteristics was found in these preliminary experiments; however, significant divergence effects were observed on thick blunt-nosed airfoils.

Langley Aeronautical Laboratory,
    National Advisory Committee for Aeronautics,
        Langley Field, Va., October 13, 1948.

REFERENCES

1. Garrick, I. E., and Rubinow, S. I.: Flutter and Oscillating Air-Force Calculations for an Airfoil in a Two-Dimensional Supersonic Flow. NACA Rep. 846, 1946. (Supersedes NACA TN 1158.)

2. Theodorsen, Theodore, and Garrick, I. E.: Mechanism of Flutter - A Theoretical and Experimental Investigation of the Flutter Problem. NACA Rep. 685, 1940.

3. Smilg, Benjamin: An Engineering Evaluation of Flutter and Other Aero-Elastic Problems at Transonic and Supersonic Speeds. ATI Tech. Data Digest, vol. 13, no. 14, July 15, 1948, pp. 9-18.

4. Barmby, J. G., and Clevenson, S. A.: Initial Test in the Transonic Range of Four Flutter Airfoils Attached to a Freely Falling Body. NACA RM L7B27, 1947.

5. Barmby, J. G., and Teitelbaum, J. M.: Initial Flight Tests of the NACA FR-2, a High-Velocity Rocket-Propelled Vehicle for Transonic Flutter Research. NACA RM L7J20, 1948.

6. Clevenson, S. A., and Lauten, William T., Jr.: Flutter Investigation in the Transonic Range of Six Airfoils Attached to Three Freely Falling Bodies. NACA RM L7K17, 1948.

TABLE I

EXPERIMENTAL AND THEORETICAL RESULTS OF FLUTTER INVESTIGATIONS

Model designation / Parameters	A-1	B-1	B-2	B-3	B-4	B-5	C-1	C-2	D-1	E-1	F-1	G-1
Description of model section . . .	NACA 65-007	NACA 16-010	NACA 16-010	NACA 16-010	NACA 16-010	NACA 16-010	8 percent circular arc	8 percent circular arc	Modified circular arc 4.74 percent thick	3 percent circular arc	3 percent double wedge	Modified circular arc 5 percent thick
Length, in.	6.06	9.125	9.125	9.125	9.125	7.50	6.00	6.00	7.125	9.125	9.125	6.00
Chord, in.	3.03	4.03	4.03	4.03	4.03	4.03	3.03	3.03	4.22	4.04	4.01	4.00
Center of gravity, percent chord .	49.1	51.6	54.6	56.0	56.7	57.0	53.0	55.4	46.0	62.6	56.5	53.5
Elastic axis, percent chord . . .	41.3	34.1	39.6	39.6	44.2	39.5	48.0	51.55	37.0	38.7	45.2	47.5
r_α^2	0.28	0.39	0.38	0.40	0.37	0.37	0.230	0.233	0.275	0.510	0.29	0.27
$1/\kappa$	64.9	95.3	108.1	113.1	113.3	130	67.1	74.1	53.5	267.5	150.8	51.7
GJ	578	3060	2945	3150	4105	2500	839	909.5	1025	2710	2220	1066
f_h, cps	133.4	95.0	100.9	98.0	104.2	104.0	157	157	110	25.2	28.5	148.5
f_α, cps	278	163	156.3	154.8	183	162	363	361	178	81.7	132.8	245
f_f, cps	180	134	132.5	134.6	131.5	136	188	184	142	71	70.5	176
$\rho \times 10^3$ (test section)	0.876	0.945	0.890	0.897	0.908	0.886	0.887	0.884	0.918	0.888	0.888	0.910
g_h	0.04	0.03	0.025	0.03	0.025	0.035	0.05	0.05	0.03	0.004	0.01	0.04
g_α	0.04	0.04	0.04	0.035	0.03	0.035	0.04	0.04	0.03	0.005	0.005	0.04
ω_h/ω_α	0.48	0.583	0.645	0.633	0.57	0.64	0.432	0.435	0.614	0.308	0.215	0.606
$v/b\omega_f$ (experimental)	10.15	9.98	10.31	10.20	10.40	10.03	9.715	9.92	9.04	19.13	19.61	7.71
$v/b\omega_f$ (theoretical)	6.946	7.770	7.109	7.546	7.938	7.683	8.53	7.18	5.28	14.85	9.38	4.92
$v/b\omega_\alpha$ (experimental)	6.59	8.21	8.74	8.91	7.44	8.42	5.02	5.055	7.25	16.7	10.35	5.54
$v/b\omega_\alpha$ (theoretical)	6.554	7.158	5.664	6.029	6.234	6.041	4.913	5.503	5.069	13.08	8.23	3.905
ω_f/ω_α (experimental)	0.648	0.822	0.847	0.870	0.719	0.840	0.518	0.51	0.798	0.868	0.531	0.718
ω_f/ω_α (theoretical)	0.944	0.921	0.797	0.800	0.785	0.786	0.577	0.766	0.96	0.88	0.868	0.795
$(v/b\omega_\alpha)$ (M = 0) (theoretical) . . .	3.427	4.302	4.245	4.358	4.121	4.612	3.184	3.374	2.811	8.263	5.491	2.585

TABLE II

FLUTTER DATA ON A CANTILEVER MODEL WITH TIP WEIGHTS

$\Bigl[$Wing chord = 4 in.; elastic axis at 47 percent chord; $r_\alpha{}^2$ = 0.23 (for wing with

no tip weights); weight of wing with no tip weights = 0.0806 lb; length of

wing (semispan) = $6\frac{1}{4}$ in.; tip-weight center of gravity coincides with the

wing center of gravity$\Bigr]$

Frequency, cps			ω_h/ω_α	Center of gravity of wing and tip weights, percent chord	$\omega_\alpha c_w,$ fps	Tip weights, lb		Moment of inertia of tip weights about c.g., in-lb-sec^2
Torsion	Bending	Flutter				L. E.	T. E.	
244	134	153	0.550	50	510	0	0	0
133	102	105	.767	50	278	.00949	.00949	.000162
103	81	86	.786	49	216	.01766	.01754	.000342
80	68	74	.850	53	167	.02747	.03044	.000686
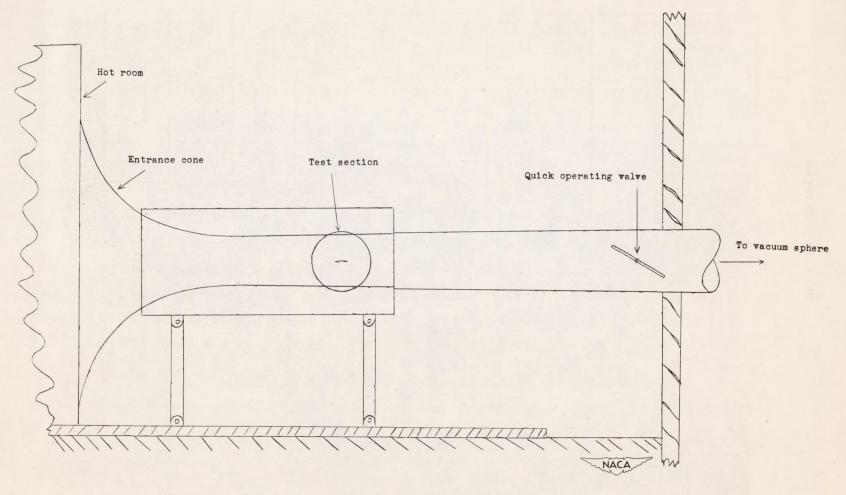
Figure 1.- Diagram of the supersonic flutter apparatus.
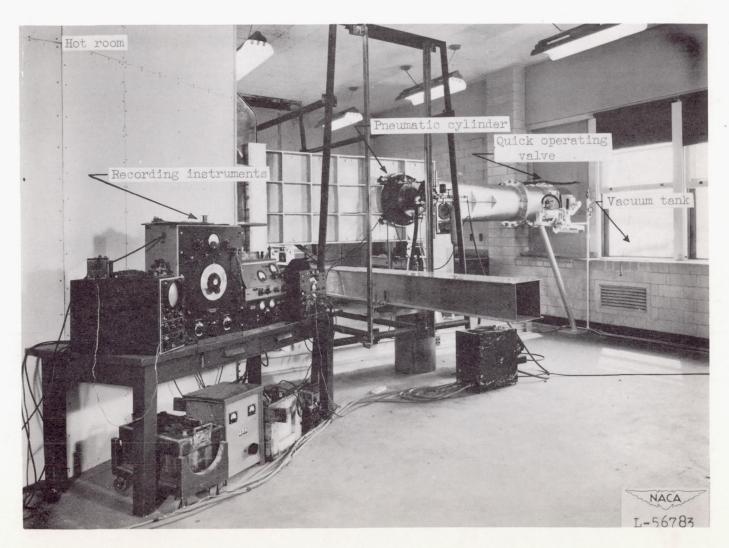
Figure 2.- General view of the Langley supersonic flutter apparatus.
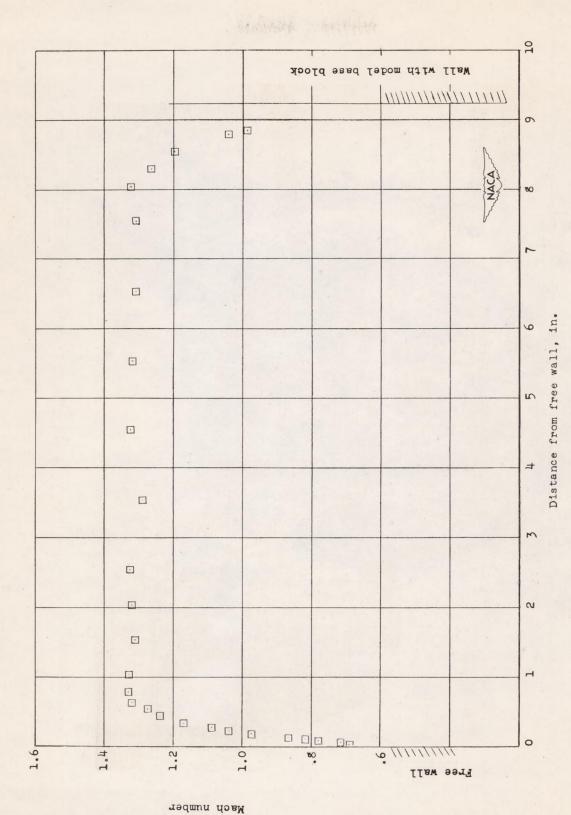
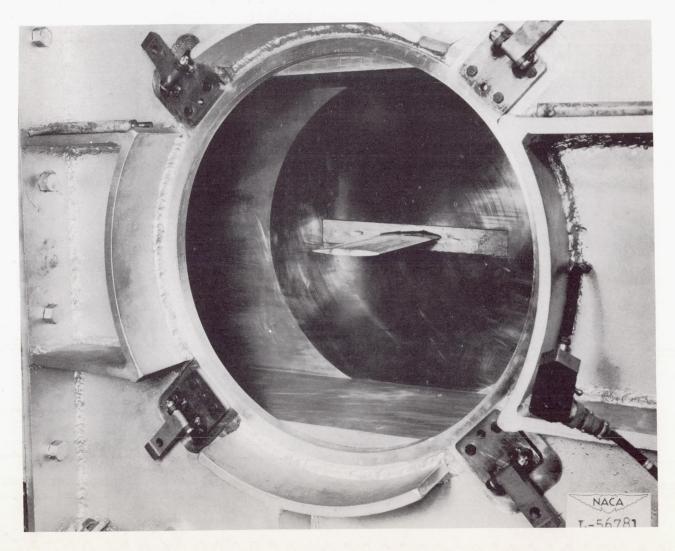Figure 3.- Mach number survey of the test section.

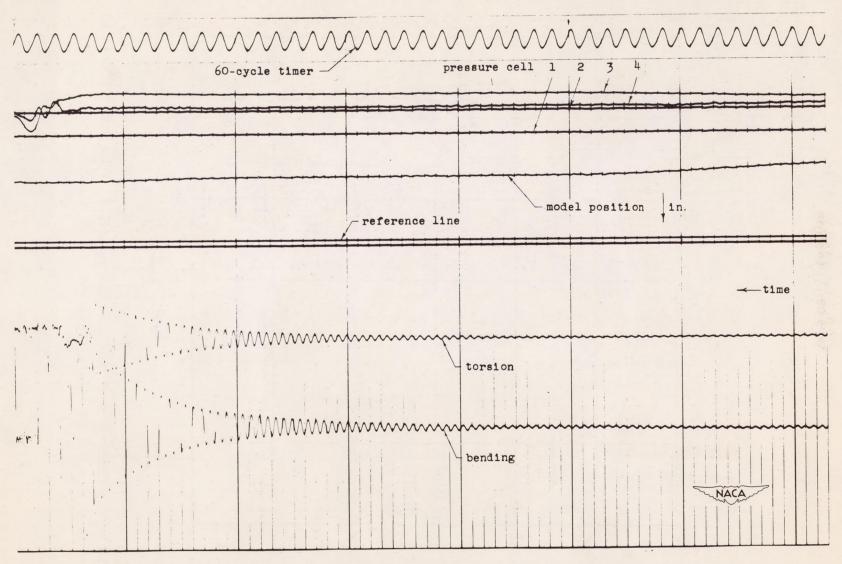Figure 4.- Flutter model installed in the test section.

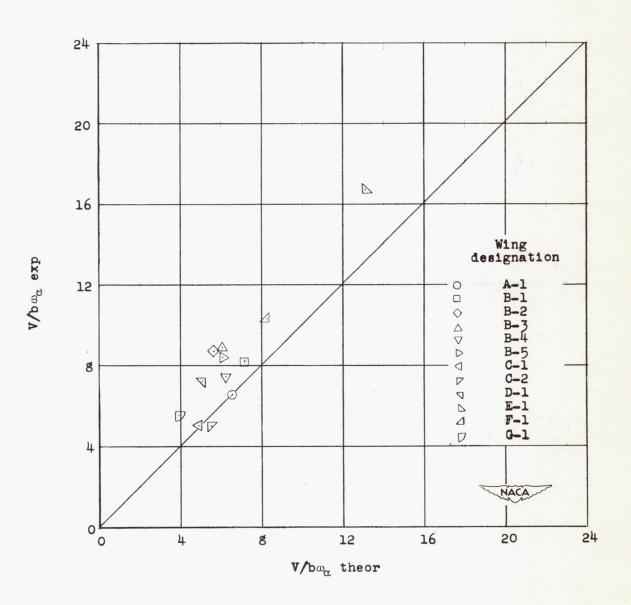Figure 5.- Sample oscillograph record of the flutter of model B-5.

Figure 6.- Comparison of experimental values of $V/b\omega_\alpha$ to theoretical values of $V/b\omega_\alpha$ at $M = 1.3$.
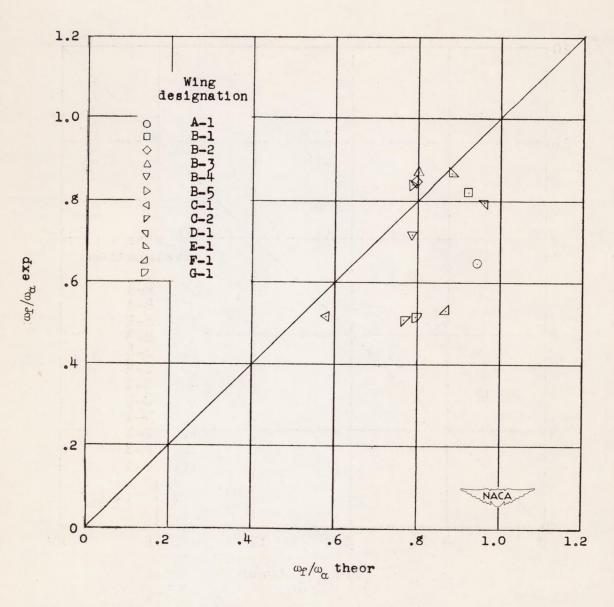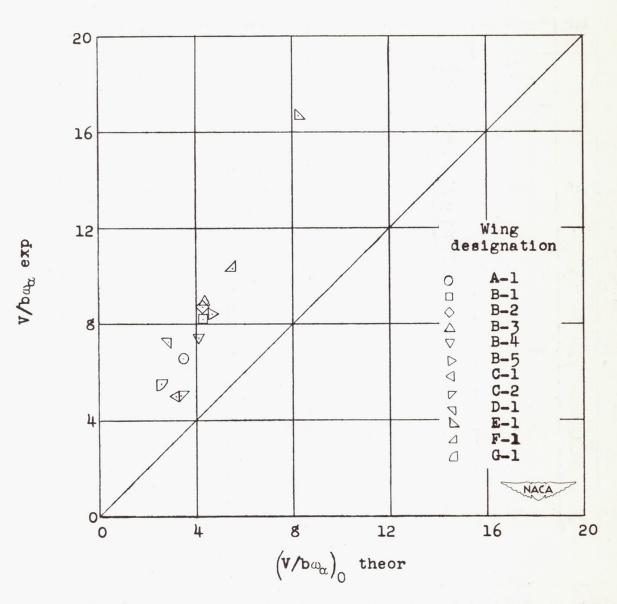
Figure 7.- Comparison of experimental values of ω_f/ω_α with theoretical values of ω_f/ω_α at $M = 1.3$.

Figure 8.- Comparison of experimental values of $V/b\omega_\alpha$ at $M = 1.3$ with theoretical incompressible values of $V/b\omega_\alpha$ at $M = 0$.
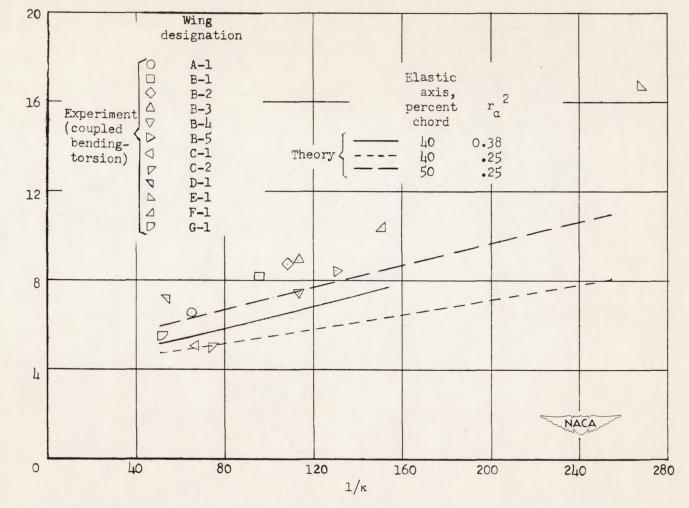
Figure 9.- Comparison of experimental values of $V/b\omega_\alpha$ for coupled wing flutter with theoretical values for one-degree-of-freedom torsional flutter. $M = 1.3$, $g_\alpha = 0.04$.